



## SPECIFICATION

P/N:OP-2LSM4915-2 0.48W

100  
LM/W




### Application:

- 3D illumination LED letters with Depth 60-200MM
- Light box with Depth 60-200MM


### Features:

- Aluminum PCB
- Light decay <3% for 6000hrs
- CRI>70
- 3-step MacAdam ellipse
- HB fire safety level
- IP65 waterproof
- Cutttable every module
- 3 years warranty

### Beam Angle:160°

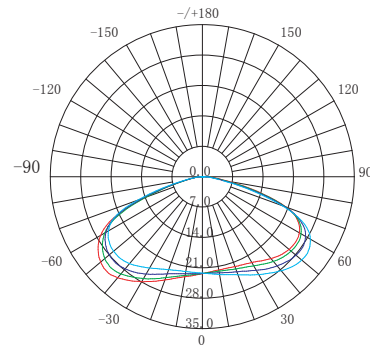



### Dimensions:

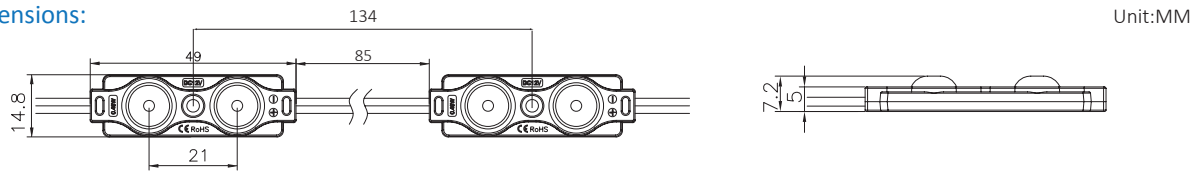


### Order INFO and Parameter:

Part No.	Voltage	Power/pc	Lumen/pcs	LED Type	Ra	Housing material	Dimension	Working TEMP	Available Color
OP-2LSM4915-2	DC12V	0.48W	55LM	SMD2835	>70	PVC	49*14.8*7.2mm	-25°C to +60 °C	<input type="radio"/> <input type="radio"/> <input type="radio"/> <input type="radio"/> <input type="radio"/> <input type="radio"/>

### Installation Reference:



Depth(H)	Dx	Dy	Qty/m <sup>2</sup>	Power/m <sup>2</sup>	Illumination
60MM	70MM	70MM	196PCS	94W	3060LUX
80MM	90MM	90MM	121PCS	58W	1780LUX
90MM	100MM	100MM	100PCS	48W	1350LUX
100MM	110MM	110MM	81PCS	39W	1070LUX

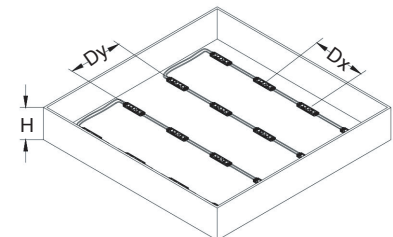

### Packing Details:

Packing	Qty/chain	Qty/bag	Qty/carton	Carton Size
Qty	20pcs	200pcs	2400pcs	45*31*29cm
Weight	0.17KG	1.7KG	20.4KG	