

# DATA SHEET: ECOLED POWER SIDE ALU 1,5 W



**Series Name:**  
**ECO Led POWER SIDE ALU**

**Product Description:**



1. **ECOLED POWERSIDE ALU:** Beam Characteristic 12\*56°, 30 modules per chain;
2. Current control to stabilise luminous flux;
3. Incredible price/quality ratio;
4. Energy saving, environment-friendly, long life-time if installed properly;
5. Ideal for single side and double side light boxes;
6. Waterproof IP67;
7. Easy to install with premounted double-sided adhesive tape and fixing screw;
8. 3 Years or 50.000 hours warranty.

**Electrical and Optical Parameters**

Code	Colour	Temperature	Lens	Flux	Lum. Eff.	Consumption	Power
LOEPS15	White	6000-7000° K	12*56°	130 lm	87	1,5 W	12 V DC

**Technical Data**

Code	Dimensions	LEDs per chain	IP	Working Temperature
LOEPS15	43x36x12,5 mm	30	67	- 25°C / + 60°C



**RoHS**

# DATA SHEET: ECOLED POWER SIDE ALU 1,5 W




Series Name:

**ECO Led POWER SIDE ALU**

Product Description:



## Dimensions (mm):

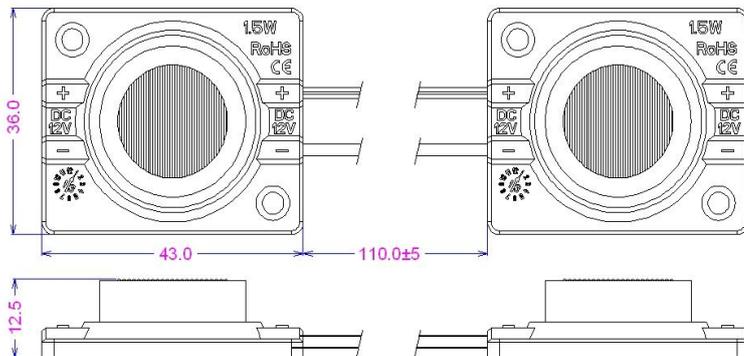

## Notes:

1. Wire thickness should be chosen according to current, power, length of wire extension (max. 5 meters) and leakage;
  2. Both ends of the extension should be waterproof;
  3. Do not work on ECOLED products in electrostatic or electrified environments;
  4. Maximum 30 pieces connected, do not exceed;
  5. Use only high quality power suppliers (with protection against blackouts, overvoltage and overloading);
  6. Use waterproof connectors made for low voltage connections;
  7. Do not exceed 10/12 hours of working cycle.
- \*\* See point 3: "Warranty terms and conditions".  
\*\* Warranty: complete text available on demand.  
Country of origin [COO]: China.

## **CMN GROUP S.r.l.**

Sede di Treviso - 31030 Vacil di Breda di Piave - Via delle Industrie, 1  
tel. 0422 632111 - fax 0422 632100 e-mail: [cmn@cmngroup.eu](mailto:cmn@cmngroup.eu) [www.cmngroup.eu](http://www.cmngroup.eu)