


# FLEXA

AUTOMATION FOR SIGN MAKERS

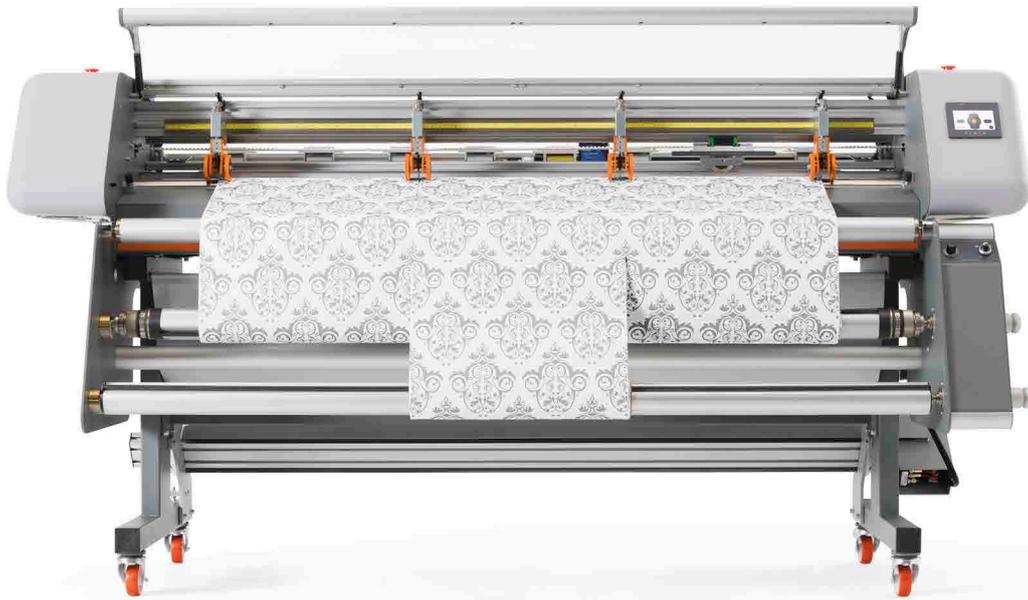

## MIURA WALLPAPER AUTOMATIC XY CUTTER FOR WALLPAPER

Highly precise cutting machine for X and Y trimming with automatic vertical cutting correction and rewinding system. Suitable for wallpaper and many other flexible supports.

- > Combined horizontal and vertical cutting for the fastest finish of your rolls
- > Trims and **directly rewinds** wallpaper's sheets on rolls (up to 3 rolls, also of different sizes). Possibility to work in addition as roll to sheets
- > Maximum precision thanks to the **EDGE CONTROL** that reads the line longitudinally printed along the entire length of the roll: perfect joints of pattern and designs on the wall
- > 4 operating modes: automatic by crop marks (roll to rolls), automatic by crop marks (roll to sheets), by set length and manual
- > Even more intuitive set up parameters thanks to the new designed user-friendly software (LCD touch screen display). New **MUTING** function that avoids possible misreading of hidden marks


### SUITABLE FOR:

- Wallpaper
- Paper (also laminated or encapsulated)
- Vinyl & self adhesive vinyl
- Backlit & frontlit display
- Reflective material
- PVC banner (up to 900 gr/m<sup>2</sup> - 27 oz./ya<sup>2</sup>)
- Magnetic rubber
- Polycarbonate (film)
- Canvas & polyester (with liner)
- Many more..






Automatic vertical alignment control panel

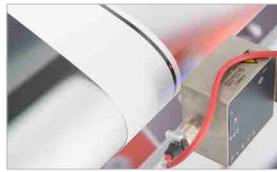

Optical sensor for vertical alignment



Advanced cutting mark reader

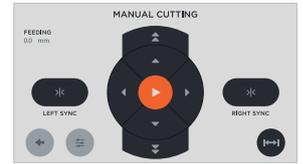

User-friendly software design



Fine positioning of the cutting blades (optional)



Fine pressure adjustment (according to the types of material)



Front rewinding shafts with independent clutches



Speed regulator and switch to adjust the rotation of the rewinding shafts



**NEW**

Slimline lengthwise rotary crush cutter, single or twin, (optional)



Single lengthwise rotary crush cutter (twin cutters optional)

Working width	1650 mm (65 in)
Feeding speed	1 - 15 m/min (3 - 49 ft/min) Roll to rolls 1 - 30 m/min (3 - 98 ft./min) Roll to sheets
Usable lengthwise cutting units	max. 8
Cross cutting speed	5 - 120 m/min (16 -393 ft/min)
Max. roll diameter	Ø 300 mm (12 in)
Max. roll weight	60 kg (132 lb)
Power supply	230 V - 50 Hz - 650 W
Dimensions (W x L x H)	2500 x 1200 x 1350 mm (99 x 47 x 53 in)
Weight	350 kg (772 lb)
Packing Dimensions (W x L x H)	2650 x 1350 x 1600 mm (104 x 53 x 63 in)
Packing Weight	410 kg (904 lb)


Manufactured in compliance with CE regulations



Follow us:



Distributor

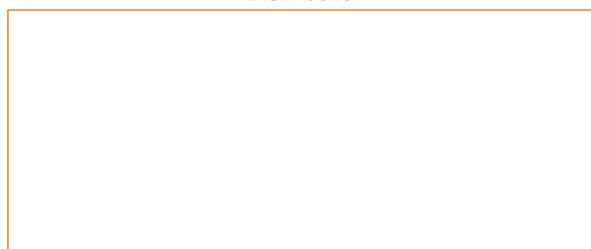

100% Made by FLEXA



100% Made in Italy

