


SAFETY

SEC 054

INSIDE APPLICATION

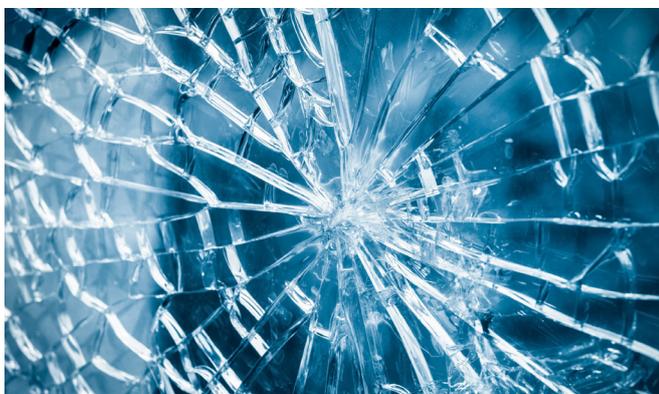

Strengthens the glass

FOR GLASS PANELS UNDER 3 SQM

This colorless film forms a membrane that holds the glass, thus **preventing the glass from shattering in case of explosion or vandalism** in places such as shops, mails, schools, hospitals, public buildings, exhibition halls, schools, gyms, housing...



Durability : from 12 to 15 years for vertical application in central Europe.



Use : Réfectiv window films are designed for use on any type of clear normal glass.



Maintenance after 30 days : with usual cleaning solutions (non-abrasive, without ammonia...). Cleaning products that may scratch the film should be avoided.



Storage : 2 years from delivery. This film should be kept away from excessive humidity and sun rays, at temperatures below 38°C.

In order to constantly improve our production we may change a product colour and manufacturing process without prior notice.

INFORMATION

MATERIAL :PET 100 MICRONS
ADHESIVE :Acrylic polymer 25 GR/M²
LINER :PET 23 microns
APPLICATION FACE :Inside
TENSIL STRENGTH :17,5 DA N/CM
ELONGATION AT BREAK :100%
TRANSMISSION UVA :5%
APPLICATION T° :min, + 5°C
FIRE RATING :B-S1, D
CEBTP :Classification standard NFP 78-406
STANDARDS :EUROCLASSES
GUARANTEE :5 years

DIMENSION

1,52 x 2,5 m
 1,52 x 5 m
 1,52 x 10 m
 1,52 x 30 m

**.2B2.
 CERTIFIED
 2017**

* For glazing not exposed to the sun

Application's
notice



Application's
video



Application Method

The glass surface to be glued on has to be free from dust, grease or other contaminants. Some specific materials such as polycarbonate can cause air bubble problems. Therefore, a compatibility test is recommended. For more precision we recommend to refer back to the application table.

Production and standards

In order to constantly improve our production we may change a product colour and manufacturing process without prior notice. Before applying our products we recommend that our users ensure that the film is suitable for the intended use and comply with current standards